



QUICK START GUIDE

Apollo4 EVB Display Kit (Shield Board Revision 1)

Ultra-low Power Apollo SoC Family

Doc. ID: QS-A4DK-1p1

Doc. Revision: 1.1, March 2023



Legal Information and Disclaimers

AMBIQ MICRO INTENDS FOR THE CONTENT CONTAINED IN THE DOCUMENT TO BE ACCURATE AND RELIABLE. THIS CONTENT MAY, HOWEVER, CONTAIN TECHNICAL INACCURACIES, TYPOGRAPHICAL ERRORS OR OTHER MISTAKES. AMBIQ MICRO MAY MAKE CORRECTIONS OR OTHER CHANGES TO THIS CONTENT AT ANY TIME. AMBIQ MICRO AND ITS SUPPLIERS RESERVE THE RIGHT TO MAKE CORRECTIONS, MODIFICATIONS, ENHANCEMENTS, IMPROVEMENTS AND OTHER CHANGES TO ITS PRODUCTS, PROGRAMS AND SERVICES AT ANY TIME OR TO DISCONTINUE ANY PRODUCTS, PROGRAMS, OR SERVICES WITHOUT NOTICE.

THE CONTENT IN THIS DOCUMENT IS PROVIDED "AS IS". AMBIQ MICRO AND ITS RESPECTIVE SUPPLIERS MAKE NO REPRESENTATIONS ABOUT THE SUITABILITY OF THIS CONTENT FOR ANY PURPOSE AND DISCLAIM ALL WARRANTIES AND CONDITIONS WITH REGARD TO THIS CONTENT, INCLUDING BUT NOT LIMITED TO, ALL IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHT.

AMBIQ MICRO DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT OF AMBIQ MICRO COVERING OR RELATING TO THIS CONTENT OR ANY COMBINATION, MACHINE, OR PROCESS TO WHICH THIS CONTENT RELATE OR WITH WHICH THIS CONTENT MAY BE USED.

USE OF THE INFORMATION IN THIS DOCUMENT MAY REQUIRE A LICENSE FROM A THIRD PARTY UNDER THE PATENTS OR OTHER INTELLECTUAL PROPERTY OF THAT THIRD PARTY, OR A LICENSE FROM AMBIQ MICRO UNDER THE PATENTS OR OTHER INTELLECTUAL PROPERTY OF AMBIQ MICRO.

INFORMATION IN THIS DOCUMENT IS PROVIDED SOLELY TO ENABLE SYSTEM AND SOFTWARE IMPLEMENTERS TO USE AMBIQ MICRO PRODUCTS. THERE ARE NO EXPRESS OR IMPLIED COPYRIGHT LICENSES GRANTED HEREUNDER TO DESIGN OR FABRICATE ANY INTEGRATED CIRCUITS OR INTEGRATED CIRCUITS BASED ON THE INFORMATION IN THIS DOCUMENT. AMBIQ MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN. AMBIQ MICRO MAKES NO WARRANTY, REPRESENTATION OR GUARANTEE REGARDING THE SUITABILITY OF ITS PRODUCTS FOR ANY PARTICULAR PURPOSE, NOR DOES AMBIQ MICRO ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT, AND SPECIFICALLY DISCLAIMS ANY AND ALL LIABILITY, INCLUDING WITHOUT LIMITATION CONSEQUENTIAL OR INCIDENTAL DAMAGES. "TYPICAL" PARAMETERS WHICH MAY BE PROVIDED IN AMBIQ MICRO DATA SHEETS AND/OR SPECIFICATIONS CAN AND DO VARY IN DIFFERENT APPLICATIONS AND ACTUAL PERFORMANCE MAY VARY OVER TIME. ALL OPERATING PARAMETERS, INCLUDING "TYPICALS" MUST BE VALIDATED FOR EACH CUSTOMER APPLICATION BY CUSTOMER'S TECHNICAL EXPERTS. AMBIQ MICRO DOES NOT CONVEY ANY LICENSE UNDER NEITHER ITS PATENT RIGHTS NOR THE RIGHTS OF OTHERS. AMBIQ MICRO PRODUCTS ARE NOT DESIGNED, INTENDED, OR AUTHORIZED FOR USE AS COMPONENTS IN SYSTEMS INTENDED FOR SURGICAL IMPLANT INTO THE BODY, OR OTHER APPLICATIONS INTENDED TO SUPPORT OR SUSTAIN LIFE, OR FOR ANY OTHER APPLICATION IN WHICH THE FAILURE OF THE AMBIQ MICRO PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR. SHOULD BUYER PURCHASE OR USE AMBIQ MICRO PRODUCTS FOR ANY SUCH UNINTENDED OR UNAUTHORIZED APPLICATION, BUYER SHALL INDEMNIFY AND HOLD AMBIQ MICRO AND ITS OFFICERS, EMPLOYEES, SUBSIDIARIES, AFFILIATES, AND DISTRIBUTORS HARMLESS AGAINST ALL CLAIMS, COSTS, DAMAGES, AND EXPENSES, AND REASONABLE ATTORNEY FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PERSONAL INJURY OR DEATH ASSOCIATED WITH SUCH UNINTENDED OR UNAUTHORIZED USE, EVEN IF SUCH CLAIM ALLEGES THAT AMBIQ MICRO WAS NEGLIGENT REGARDING THE DESIGN OR MANUFACTURE OF THE PART.

Table of Content

1. Introduction	6
2. Document Revision History	7
3. Reference Documents and Software	8
4. Quick Start	9
5. Overview of the Apollo4 Display Kit	10
6. Software Development Tools	13
7. Graphics Development Tools	14
8. Hardware Configuration Options	15
9. Ordering Information	17

List of Figures

Apollo4 Display Kit	6
Apollo4 Display Kit Block Diagram.....	10
Apollo4 Display Shield Parts Locations	11
PSU page of the Display Shield schematic.....	15
GPIO79 Pin Connection Options	16

List of Tables

Document Revision History.....	7
EVB / Shield Ordering Information.....	17
SoC Ordering Information.....	17

1. Introduction

This document provides guidance in setting up the Display Kit hardware, part number AMAP4DISP, revision 1, on the Apollo4 Evaluation Board (EVB), revision 3, to get started executing memory and display examples and measuring power consumption in various configurations. The Apollo4 Display Kit is also intended to provide an introduction to the GUI Builder.



Figure 1. Apollo4 Display Kit

2. Document Revision History

Table 1: Document Revision History

Rev #	Date	Description
1.0	Aug 2021	Document initial public release.
1.1	Mar 2023	Compatibility note added in section “Overview of the Apollo4 Display Kit” on page 10. Updated section “Software Development Tools” on page 13.

3. Reference Documents and Software

The following items may be useful in understanding and using the EVB.

- EVB Schematic
- Apollo4 SoC Datasheet
- Apollo4 Family Programmer's Guide
- Apollo4 Errata List
- AmbiqSuite SDK

4. Quick Start

The Apollo4 Display Kit comes with the following items:

- Apollo4 Evaluation Board (EVB), revision 3
- Apollo4 Display Shield, revision 1
- USB Type C cable
- Four adhesive-backed rubber feet
- Extra jumpers

Caution: The EVB has components loaded on the back of the board. Care should be taken to not damage these components. The included rubber feet should be applied to the bottom of the board to prevent direct contact between the components and a desk surface.

The EVB in the Apollo4 Display Kit comes with jumpers pre-configured for default operation. Also, it has been pre-programmed with the `nemagfx_balls_bench` example program. To begin EVB program execution, first carefully attach the Apollo4 Display Shield to the Apollo4 EVB. Press the two boards together as evenly as possible until the display shield is fully seated on the connectors of the EVB. Then connect the USB-C cable from a USB port on a PC to the J-Link USB connector (J6) on the EVB, and turn on the power switch (SW4). The blue LED under the power switch should illuminate. The display should immediately display balls of various colors and sizes bouncing around the display, blending their colors where they intersect.

The AmbiqSuite SDK provides many example programs that may be run on the Display Kit. To run these examples, download the SDK via the link provided above and select any of the pre-built examples in the SDK at `/boards/apollo4b_bga_evb_disp_shld/examples`.

5. Overview of the Apollo4 Display Kit

The Apollo4 Display Kit consists of two PCB assemblies:

1. The Apollo4 EVB (AMAP4EVB), **revision 3 or later**
2. The Apollo4 Display Shield revision 1

Please note that the Apollo4 Display Kit is only compatible with the (non-blue) Apollo4 EVB, part number AMAP4EVB.

The two board assemblies have combined features and interconnection according to the block diagram of Figure 2.

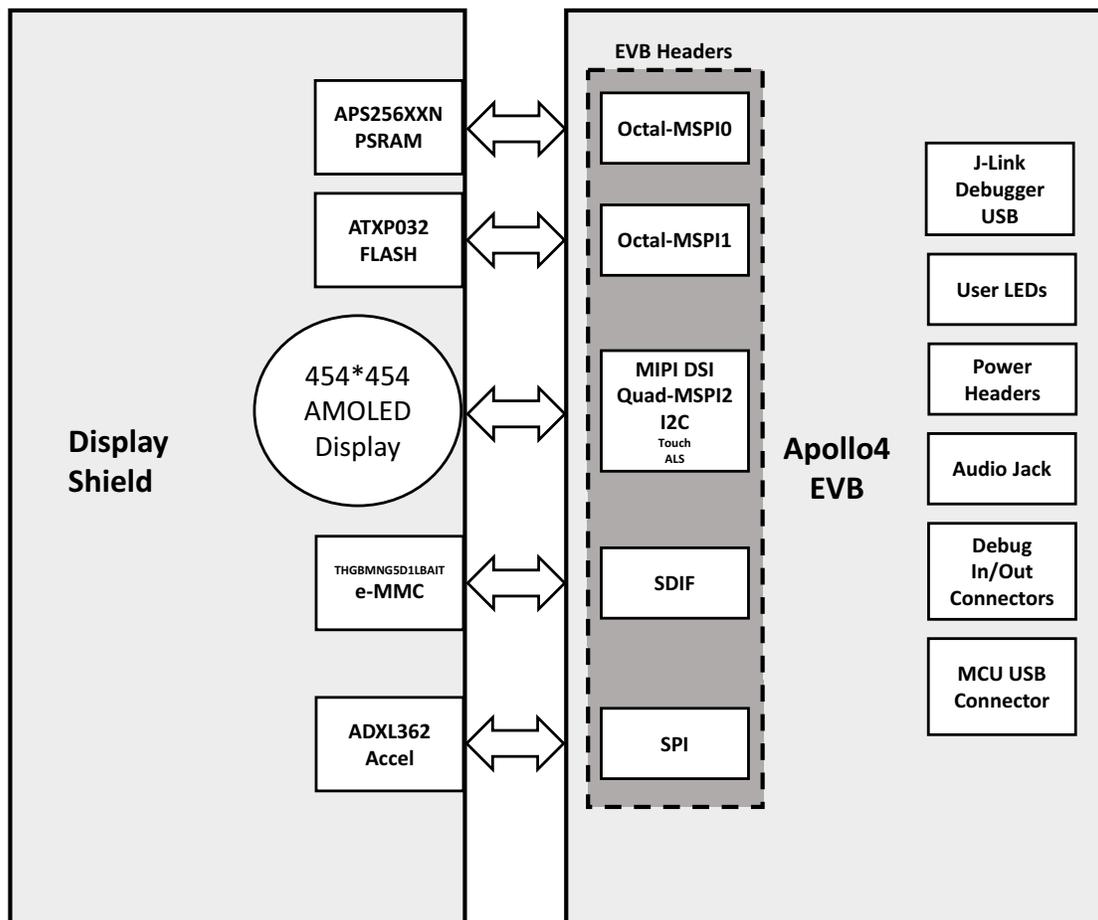


Figure 2. Apollo4 Display Kit Block Diagram

Figure 3 identifies the major components on the Display Shield.

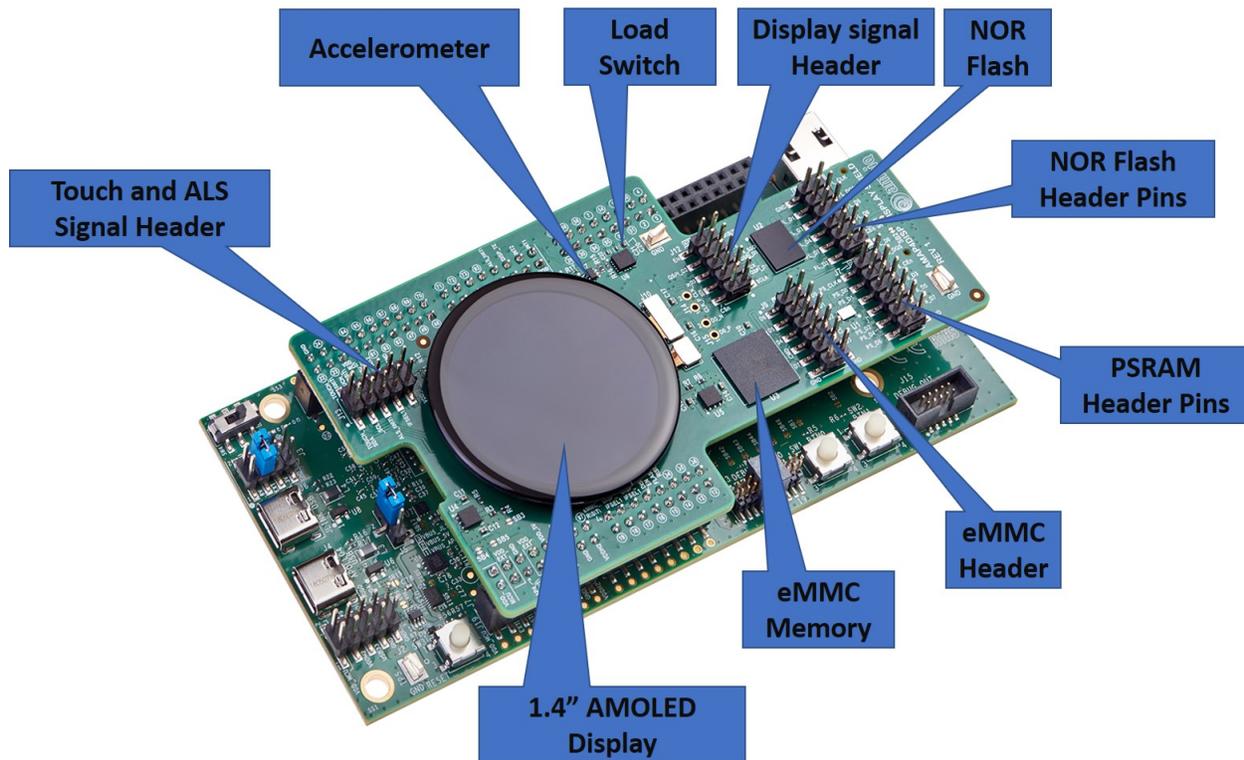


Figure 3. Apollo4 Display Shield Parts Locations

The Display Kit has these additional features:

- Apollo4 Display Shield
 - 1.4" 454*454 Pixel MIPI AMOLED Display
 - Display Laminated Capacitive Touch Sensor - TMA525C
 - 256 Mb HexSPI Double-Data-Rate (DDR) Enabled PSRAM - APS256XXN
 - 32 Mb Octal-SPI DDR-enabled flash memory - AXP032
 - 4 GB x1/x4/x8 e-MMC module - THGBMNG5D1LBAIT
 - 3-Axis MEMS accelerometer - ADXL362
- Apollo4 AMAP4EVB Evaluation Board
 - USB Type C connector for power/download/debug
 - USB Type C connector for power/data to Apollo4
 - Segger J-Link debugger
 - Debugger-in port (SWD or ETM)
 - Three user-controlled LEDs
 - Two push buttons for application use, plus a reset push button
 - Power slide switch with LED power indicator
 - 3.5 mm Audio Jack (SJ-435107) for evaluating low-power analog audio interface

For a full overview of the Apollo4 EVB's offerings, please refer to the AMAP4EVB Quick Start Guide, which includes information about the debug interface.

Caution: The EVB has components loaded on the back of the board. Care should be taken to not damage these components.

NOTE

The Apollo4 Plus Display Shield and the Apollo4 Display Shield are not compatible with each other due to pin differences. The Apollo4 Plus Display Shield must be used with the Apollo4 Plus EVB (AMAP4PEVB), and the Apollo4 Display Shield must be used with the Apollo4 EVB (AMAP4EVB).

Each display kit has its own board support package (BSP) provided in the AmbiqSuite SDK. Support for the Apollo4 Plus Display Shield started in release 4.3.0.

Aside from pin differences, other differences between the two display shields are the following Apollo4 Plus Display Shield features:

- The MSPI1 flash device was changed from Adesto ATXP032 used on the Apollo4 Display Shield to ISSI IS25WX064.
- A mux was added to swap between the upper data pins of the MSPI0 hex interface to the PSRAM (MSPI1 not used) and MSPI1 octal interface to the IS25WX064 DDR Flash, as described at the beginning of this section.

5.1 Secure Boot on the Apollo4 SoC

Apollo4 SoC parts from the Ambiq Micro factory are preprogrammed with a Secure Bootloader and an uninitialized Customer Info Space, referred to as INFO0. Initial provisioning of the part would include programming a valid INFO0 and programming the main firmware image in the flash. The Apollo4 EVB is shipped with the INFO0 configuration pre-programmed with optimal settings for the EVB layout:

1. Default boot to non-secure mode.
2. Enable Boot Override to Push Button on GPIO18 (OTP setting) - BTN0/SW1.
3. Enable wired updates over UART0.
 - A. UART0 is mapped to JLINK (OTP Setting).
 - B. Baud rate is 115200 bps, no-parity, 8-bit data length, no flow control.
 - C. Timeout is 3 seconds.

For your reference, the following settings are programmed into INFO0 on the Apollo4 SoC resident on the EVB:

- Simo Buck is NOT enabled.
- Secure Bootloader (SBL) interface is configured to UART using GPIO47 and GPIO60, which allows secure boot to be performed over the J-Link COM interface of the EVB.
- SBL override pin is configured to GPIO18 which is BTN0/SW1 on the EVB.
- All Flash and Debugger protection features are disabled.

For information on changing the INFO0 settings as well as using the Secure Bootloader, please refer to the *README.txt* file, which can be found in the tools\apollo4b_scripts folder of the latest SDK release supporting the Apollo4 family. This folder contains a number of python scripts to demonstrate generation of INFO0 settings, customer main images, and the creation of images for the Wired Update protocol over UART.

6. Software Development Tools

The standard Segger J-Link debug interface is used on the EVB for this Display Shield. Please install the latest Segger J-Link software, and configure your preferred development IDE (Keil, IAR, or Eclipse) to use the J-Link debug interface. Please consult the release notes of the latest/applicable SDK release for the version of the tools used during testing of the SDK and which are recommended for development with the SDK.

Links to the supported development tools are listed below.

- SEGGER J-Link Software: <https://www.segger.com/downloads/jlink>
- KEIL uVision 5 (ARM Compiler 5): <https://www.keil.com/demo/eval/arm.htm>
- Latest Keil Pack (CMSIS Ambiq Pack): <http://www.keil.com/dd2/pack/#/third-party-download-dialog>
- IAR IDE/Compiler: <https://www.iar.com/iar-embedded-workbench/tools-for-arm/arm-cortex-m-edition/>
- GCC (GNU Arm Embedded Toolchain): <https://gcc.gnu.org>

Regardless of IDE used, please install the Segger J-Link software. All of the above development environments support J-Link, but you must have the latest J-Link software installed. Most alternate development environments also support J-Link.

Please refer to the AmbiqSuite SDK Getting Started Guide for more details on setting up development IDEs to use J-Link.

7. Graphics Development Tools

The Apollo4 Display Kit supports the Nema|GUI-Builder GUI Builder from Think Silicon (https://www.think-silicon.com/?section=2183&language=en_US). The tool offers various color formatting, display widgets, animations and other features written in the C programming language. The NEMA|GUI-Builder interfaces directly with the Apollo4's GPU and provides a software abstraction layer to organize and employ drawing commands, while requiring minimum CPU/MCU usage and power consumption.

Required system resources are as follows:

- **OS:** Windows® (10), Linux® (Ubuntu 32/64-bit)
- **Screen Resolution:** 800×600 or higher
- **RAM:** 256MB
- **Storage:** 100MB available space

The Nema|Gui-Builder offers the following features.

Color Formats

- Support for multiple color formats for both source and destination textures
- 32-bit: RGBA8888 / BGRA8888 / ABGR8888
- 24-bit: RGB
- 16-bit: RGBA5551 / RGB565
- 8-bit: A8 / L8 / RGB332
- 4-bit: A4 / L4
- 2-bit: A2 / L2
- 1-bit: A1 / L1
- TSC (see GUI-Builder documentation for details)

Widgets

- Label button
- Icon button
- Radio button
- Horizontal slider
- Vertical slider
- Digital meter
- Icons
- Progress bar
- Gauge
- Circular progress
- Watch face

Transitions and Animations

- Alpha blending
- Programmable size, offset and format per layer
- Programmable stride/pitch enabling panning and clipping

Other Features

- Transparency
- Color keying
- Multi-function image processing

8. Hardware Configuration Options

8.1 Power Supply Configuration

The Apollo4 Display Shield is connected to the AMAP4EVB hardware through each of the five GPIO headers present on the EVB, as well as the high-speed connector, and as a result the display shield derives its power supplies from the 5V USB supply of the EVB. The two derived power supplies are:

- VDD_1V9_PSU – Default 1.9V, configurable to 1.8V by shorting solder-bridge SB3
- VDD_3V3

The VDD_1V9_PSU rail is by default the source of power for the SHIELD_PSU rail, which is the supply for each of the 1.9V on the display shield. However, by using solder bridges SB4 and SB5, the user can configure the SHIELD_PSU rail to be supplied by an external supply, VDD_MCU of the Apollo4 EVB, or by the default option of VDD_1V9_PSU.

- External Supply – Open SB4, Short SB5 on Display Shield, connect external supply to VDD_EXT on J3 of AMAP4EVB.
- VDD_MCU of AMAP4PEVB – Open SB4, Short SB5, connect jumper between VDD_EXT and VDD_MCU on J3 of AMAP4EVB.

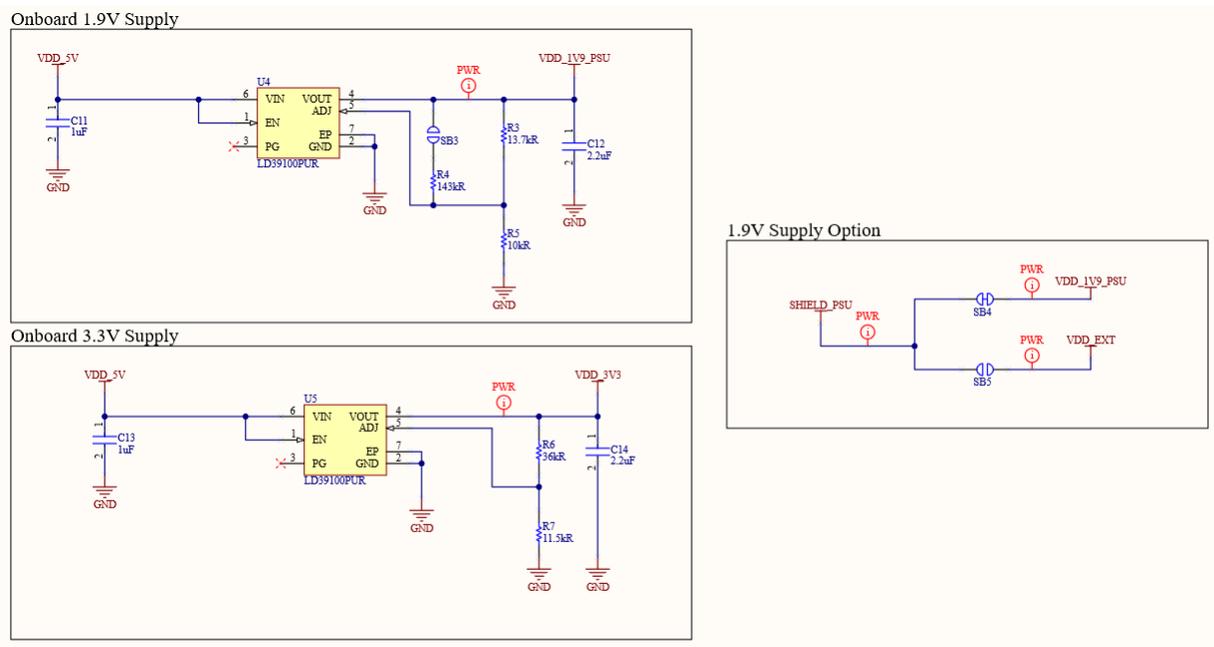


Figure 4. PSU page of the Display Shield schematic

By using an external supply, or the on-board VDD_1V9_PSU rail, the user is able to take accurate current measurements of the Apollo4 under a variety of conditions offered by the Display Kit without extra load on the Apollo4 SoC rails. Please consult the AMAP4EVB Quick Start Guide for details on taking current measurements with the Apollo4 EVB.

8.2 eMMC/SPI Solder-Bridge

Solder-bridges 1 and 2 are used to select between the SDIF_DAT4 (eMMC_D4) and DISP_SPI_SDI (AP4_DISP_SDI) hardware connections for the GPIO79 pin. By default, the hardware is configured to connect to the e-MMC device.

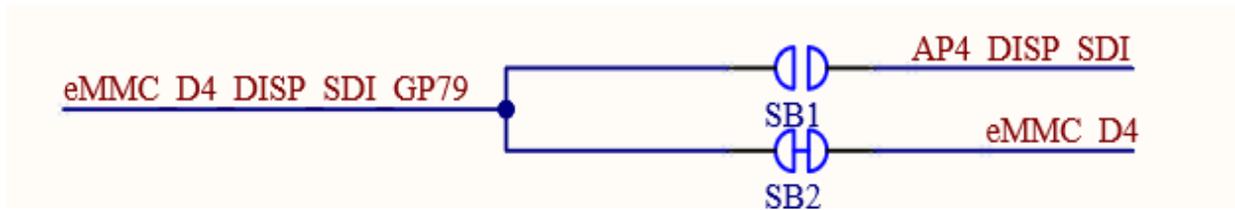


Figure 5. GPIO79 Pin Connection Options

8.3 Other Solder-bridge Options

For other solder-bridge options, please consult the Apollo4 EVB Quick Start Guide.

9. Ordering Information

Table 2: EVB / Shield Ordering Information

Device Name	Orderable Part Number	Board Revision	SoC	SoC Package	Availability
Apollo4 Display Kit ^a	AMAP4DISP	EVB Rev. 3 / Shield Rev. 1	Apollo4	146-pin BGA	4Q2021

a. Includes Apollo4 EVB and Apollo4 Display Shield

Table 3: SoC Ordering Information

Device Name	Orderable Part Number ^a	MRAM	RAM	Package	Packing	Operating Temperature Range	Availability
Apollo4 SoC	AMAP42KK-KBR-B2	2 MB	1.8 MB	5.0 x 5.0, 146-pin BGA	Tape and Reel	-20 to 60°C	Now

a. The silicon revision is identified by the first letter in the bottom row of the package's top marking.



©2023 Ambiq Micro, Inc. All rights reserved.

Ambiq Micro, Inc.

6500 River Place Boulevard, Building 7,

Suite 200, Austin, TX 78730-1156

www.ambiq.com/

sales@ambiqmicro.com

<https://support.ambiqmicro.com>

+1 (512) 879-2850

QS-A4DK-1p1

Version 1.1

March 2023