

## STARTING GUIDE

# Nema Pixpresso

A-SOCAPG-SGGA01EN v1.0



## Legal Information and Disclaimers

AMBIQ MICRO INTENDS FOR THE CONTENT CONTAINED IN THE DOCUMENT TO BE ACCURATE AND RELIABLE. THIS CONTENT MAY, HOWEVER, CONTAIN TECHNICAL INACCURACIES, TYPOGRAPHICAL ERRORS OR OTHER MISTAKES. AMBIQ MICRO MAY MAKE CORRECTIONS OR OTHER CHANGES TO THIS CONTENT AT ANY TIME. AMBIQ MICRO AND ITS SUPPLIERS RESERVE THE RIGHT TO MAKE CORRECTIONS, MODIFICATIONS, ENHANCEMENTS, IMPROVEMENTS AND OTHER CHANGES TO ITS PRODUCTS, PROGRAMS AND SERVICES AT ANY TIME OR TO DISCONTINUE ANY PRODUCTS, PROGRAMS, OR SERVICES WITHOUT NOTICE.

THE CONTENT IN THIS DOCUMENT IS PROVIDED "AS IS". AMBIQ MICRO AND ITS RESPECTIVE SUPPLIERS MAKE NO REPRESENTATIONS ABOUT THE SUITABILITY OF THIS CONTENT FOR ANY PURPOSE AND DISCLAIM ALL WARRANTIES AND CONDITIONS WITH REGARD TO THIS CONTENT, INCLUDING BUT NOT LIMITED TO, ALL IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHT.

AMBIQ MICRO DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT OF AMBIQ MICRO COVERING OR RELATING TO THIS CONTENT OR ANY COMBINATION, MACHINE, OR PROCESS TO WHICH THIS CONTENT RELATE OR WITH WHICH THIS CONTENT MAY BE USED.

USE OF THE INFORMATION IN THIS DOCUMENT MAY REQUIRE A LICENSE FROM A THIRD PARTY UNDER THE PATENTS OR OTHER INTELLECTUAL PROPERTY OF THAT THIRD PARTY, OR A LICENSE FROM AMBIQ MICRO UNDER THE PATENTS OR OTHER INTELLECTUAL PROPERTY OF AMBIQ MICRO.

INFORMATION IN THIS DOCUMENT IS PROVIDED SOLELY TO ENABLE SYSTEM AND SOFTWARE IMPLEMENTERS TO USE AMBIQ MICRO PRODUCTS. THERE ARE NO EXPRESS OR IMPLIED COPYRIGHT LICENSES GRANTED HEREUNDER TO DESIGN OR FABRICATE ANY INTEGRATED CIRCUITS OR INTEGRATED CIRCUITS BASED ON THE INFORMATION IN THIS DOCUMENT. AMBIQ MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN. AMBIQ MICRO MAKES NO WARRANTY, REPRESENTATION OR GUARANTEE REGARDING THE SUITABILITY OF ITS PRODUCTS FOR ANY PARTICULAR PURPOSE, NOR DOES AMBIQ MICRO ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT, AND SPECIFICALLY DISCLAIMS ANY AND ALL LIABILITY, INCLUDING WITHOUT LIMITATION CONSEQUENTIAL OR INCIDENTAL DAMAGES. "TYPICAL" PARAMETERS WHICH MAY BE PROVIDED IN AMBIQ MICRO DATA SHEETS AND/OR SPECIFICATIONS CAN AND DO VARY IN DIFFERENT APPLICATIONS AND ACTUAL PERFORMANCE MAY VARY OVER TIME. ALL OPERATING PARAMETERS, INCLUDING "TYPICALS" MUST BE VALIDATED FOR EACH CUSTOMER APPLICATION BY CUSTOMER'S TECHNICAL EXPERTS. AMBIQ MICRO DOES NOT CONVEY ANY LICENSE UNDER NEITHER ITS PATENT RIGHTS NOR THE RIGHTS OF OTHERS. AMBIQ MICRO PRODUCTS ARE NOT DESIGNED, INTENDED, OR AUTHORIZED FOR USE AS COMPONENTS IN SYSTEMS INTENDED FOR SURGICAL IMPLANT INTO THE BODY, OR OTHER APPLICATIONS INTENDED TO SUPPORT OR SUSTAIN LIFE, OR FOR ANY OTHER APPLICATION IN WHICH THE FAILURE OF THE AMBIQ MICRO PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR. SHOULD BUYER PURCHASE OR USE AMBIQ MICRO PRODUCTS FOR ANY SUCH UNINTENDED OR UNAUTHORIZED APPLICATION, BUYER SHALL INDEMNIFY AND HOLD AMBIQ MICRO AND ITS OFFICERS, EMPLOYEES, SUBSIDIARIES, AFFILIATES, AND DISTRIBUTORS HARMLESS AGAINST ALL CLAIMS, COSTS, DAMAGES, AND EXPENSES, AND REASONABLE ATTORNEY FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PERSONAL INJURY OR DEATH ASSOCIATED WITH SUCH UNINTENDED OR UNAUTHORIZED USE, EVEN IF SUCH CLAIM ALLEGES THAT AMBIQ MICRO WAS NEGLIGENT REGARDING THE DESIGN OR MANUFACTURE OF THE PART.

## Revision History

| Revision | Date          | Description      |
|----------|---------------|------------------|
| 1.0      | December 2025 | Initial Release. |

## Reference Documents

| Document ID       | Description   |
|-------------------|---|
| A-SOCAPG-UMGA01EN | Nema DC API Library User's Manual                         |
| A-SOCAPG-UMGA02EN | Nema GFX API Library User's Manual                        |
| A-SOCAPG-UMGA03EN | Nema GFX Extension Vector Graphics User's Manual          |
| A-SOCAPG-ANGA01EN | Nema DC MiP Panels Configuration Application Note         |
| A-SOCAPG-ANGA02EN | Nema GFX Extensions TSVG Supported Elements List App Note |
| A-SOCAPG-ANGA03EN | Nema GFX API Debugging Application Note                   |
| A-SOCAPG-UMGA04EN | Nema GUI-builder User's Manual                            |
| A-SOCAPG-UMGA05EN | Nema GFX Benchmark Suite User's Manual                    |
| A-SOCAPG-UMGA06EN | Nema Pico Graphics Processing Unit User's Manual          |
| A-SOCAPG-UMGA07EN | Nema Pico Platform Drivers User's Manual                  |

# Table of Contents

|                                     |           |
|-------------------------------------|-----------|
| <b>1. Preface .....</b>             | <b>7</b>  |
| <b>2. System Requirements .....</b> | <b>8</b>  |
| <b>3. Features .....</b>            | <b>9</b>  |
| <b>4. Functionality .....</b>       | <b>12</b> |
| 4.1 GUI Mode .....                  | 12        |
| 4.2 Command Line Mode .....         | 15        |

## List of Tables

Table 3-1 32-Bit RGBA Family, 16-bit RGBA, A and L Family Format Pixel Encoding ..... 10

## List of Figures

|  |    |
|--|----|
| Figure 4-1 Nema Pixpresso Layout .....                         | 12 |
| Figure 4-2 Nema Pixpresso State After a Conversion .....       | 13 |
| Figure 4-3 Zooming in a Sub Region of the Original Image ..... | 14 |

SECTION

1

## Preface

Nema Pixpresso is an image conversion software developed by Think Silicon S.A., An Applied Materials Company. Its main purpose is to provide an easy and efficient way of converting images into/from formats suitable for low power embedded platforms.

SECTION

2

## System Requirements

The following are the system requirements:

- **Operating System:**  
Windows 10, Linux (Ubuntu), MacOS 14 (Sonoma)
- **Screen Resolution:**  
800 x 600 or higher
- **RAM:**  
At least 256MB for up to 1080p images (512MB and 768MB for 4K and 8K images respectively)
- **Hard Drive:**  
Windows 10, Linux (Ubuntu), MacOS 14 (Sonoma)

## SECTION

# 3

## Features

The current version of NEMA|pix-presso supports conversion to/from several image formats. More specifically it supports conversion to PNG, JPG, RGBA8888, ABGR8888, BGRA8888, ARGB8888, RGB24, BGR24, RGBA5650, BGRA5650, RGBA5551, ARGB1555, ABGR1555, BGRA5551, RGBA4444, ARGB4444, ABGR4444, BGRA4444, RGBA332, RGBA2222, BGRA2222, ABGR2222, ARGB2222, AL88, AL44, A8, A4, A2, A1, L8, L4, L2, L1, LUT2, LUT4, LUT16, LUT256 along with Think Silicon's proprietary image formats; TSC4, TSC6, TSC6a, TSC12, TSC12a, TSC6a+ ,and TSVG. Moreover, it supports conversion from the same image formats as well as SVG format.

LUT formats (LUT2, LUT4, LUT16, LUT256) are output only formats and produce two image files: the pallet (filename\_palette.COUNT.rgb) and indices (filename\_indices.COUNT.gray). The pallet defines a set of colors and the indices indicate for each pixel an index value in the palette. COUNT is the color count in each pallet (2, 4, 16 or 256).

The image formats have been selected according to the purpose of this tool, which is to offer the user the flexibility to convert images into formats suitable for low power embedded devices. Such devices support uncompressed formats (32-bit RGBA family) and compressed formats with direct memory mapping (16-bit RGBA, A, L and TSC family formats). Along with these formats, PNG is supported as an export format so that the user can convert any kind of images into a widely acceptable display format (and for instance, make displayable, in almost any image viewer software, compressed images). JPG and SVG are supported as import format since they are widely used formats in mainstream computing.

The 32-bit RGBA family, encode each channel of a pixel in 8-bits, and the only difference among these formats is the way that the channels are stored in memory. RGBA5650 uses 5-bits for the red and blue channel and 6-bits for the green channel, while the alpha channel is omitted; the pixel encoding in RGBA5551, RGBA4444 and RGBA332 formats is derived respectively. When converting from bigger formats to smaller ones, eg. RGBA8888 to RGBA332, dithering can be applied as well. A8 and A1 formats keep only the information of the alpha channel (transparency channel encoded in 8 or 1-bits respectively). L8, L4, L2, L1 contain only the luminance of each pixel (encoded in 8, 4, 2 and 1-bit respectively). Table 3-1 on page 10 illustrates the pixel encoding according to these formats.

Table 3-1: 32-Bit RGBA Family, 16-bit RGBA, A and L Family Format Pixel Encoding

|   | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9  | 8  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RGBA8888 (32-bit with transparency)       | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 |
| ABGR8888 (32-bit with transparency)       | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
| BGRA8888 (32-bit with transparency)       | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| ARGB8888 (32-bit with transparency)       | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
| RGB24 (24-bit without transparency)       |    |    |    |    |    |    |    |    | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 |
| BGR24 (24-bit without transparency)       |    |    |    |    |    |    |    |    | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| RGBA5650 (16-bit without transparency)    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B4 | B3 | B2 | B1 | B0 |
| BGRA5650 (16-bit without transparency)    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | B4 | B3 | B2 | B1 | B0 | G5 | G4 | G3 | G2 | G1 | G0 | R4 | R3 | R2 | R1 | R0 |
| RGBA5551 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R4 | R3 | R2 | R1 | R0 | G4 | G3 | G2 | G1 | G0 | B4 | B3 | B2 | B1 | B0 | A0 |
| ARBG1555 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A0 | R4 | R3 | R2 | R1 | R0 | G4 | G3 | G2 | G1 | G0 | B4 | B3 | B2 | B1 | B0 |
| ABGR1555 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A0 | B4 | B3 | B2 | B1 | B0 | G4 | G3 | G2 | G1 | G0 | R4 | R3 | R2 | R1 | R0 |
| BGRA5551 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | B4 | B3 | B2 | B1 | B0 | G4 | G3 | G2 | G1 | G0 | R4 | R3 | R2 | R1 | R0 | A0 |
| RGBA4444 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R3 | R2 | R1 | R0 | G3 | G2 | G1 | G0 | B3 | B2 | B1 | B0 | A3 | A2 | A1 | A0 |
| ARGB4444 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A3 | A2 | A1 | A0 | R3 | R2 | R1 | R0 | G3 | G2 | G1 | G0 | B3 | B2 | B1 | B0 |
| ABGR4444 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A3 | A2 | A1 | A0 | B3 | B2 | B1 | B0 | G3 | G2 | G1 | G0 | R3 | R2 | R1 | R0 |
| BGRA4444 (16-bit with transparency)       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | B3 | B2 | B1 | B0 | G3 | G2 | G1 | G0 | R3 | R2 | R1 | R0 | A3 | A2 | A1 | A0 |
| RGBA332 (8-bit without transparency)      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R2 | R1 | R0 | G2 | G1 | G0 | B1 | B0 |
| RGBA2222 (8-bit with transparency)        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R1 | R0 | G1 | G0 | B1 | B0 | A1 | A0 |
| BGRA2222 (8-bit with transparency)        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | B1 | B0 | G1 | G0 | R1 | R0 | A1 | A0 |
| ABGR2222 (8-bit with transparency)        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A1 | A0 | B1 | B0 | G1 | G0 | R1 | R0 |
| ARGB2222 (8-bit with transparency)        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A1 | A0 | R1 | R0 | G1 | G0 | B1 | B0 |
| AL88 (16-bit grayscale with transparency) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 | L7 | L6 | L5 | L4 | L3 | L2 | L1 | L0 |
| AL44 (8-bit grayscale with transparency)  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A3 | A2 | A1 | A0 | L3 | L2 | L1 | L0 |
| L8 (8-bit grayscale)                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| L4 (4-bit grayscale)                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| L2 (2-bit grayscale)                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| L1 (1-bit grayscale)                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A8 (8-bit transparency only)              |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
| A4 (4-bit transparency only)              |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A2 (2-bit transparency only)              |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A1 (1-bit transparency only)              |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

The TSC family consists of a series of lossy block-based compression that used 4, 6 or 12-bits per pixel. TSC4, TSC6 TSC12 formats are suitable for compressing images with no transparency. The compression of images with transparency (alpha channel) can be handled by the TSC6a, TSC12a and TSC6a+ format. Each of the TSC family formats (except TSC12/TSC12a) is implemented using two different versions of the compression algorithm (Fast and High Quality). The final compressed image occupies the same size in both cases. Nevertheless, the user is free to choose the compression algorithm according to their demands.

The TSVG format is a binary format, suitable for containing SVG information in binary form. The benefits of converting an SVG image to the TSVG binary format is lower memory usage and higher performance compared with parsing an SVG file at runtime. The SVG elements and attributes that are supported for conversion in the TSVG format are detailed in the document *Nema GFX Extensions TSVG Supported Elements List App Note A-SOCAPG-ANGA02EN*.

In addition, Nema Pixpresso is able to convert (as well as import) images using the Morton order (Z-order) encoding. Enabling this option will not affect the selected format. This encoding technique has the advantage that the pixels within an image are reordered in way that they preserve their locality while being treated as one dimension data. In order to convert an image to a selected format using the Morton order encoding, the respective check box needs to be checked.

## SECTION


# 4

## Functionality

### 4.1 GUI Mode


Nema Pixpresso adopts the layout illustrated in Figure 4-1. This consists of a menu bar, three image view areas (one for the source, target and difference image respectively), a zoom slider, a combo-box that allows the user to select the target image format, a check box in order to select whether the converted image will be encoded using the Morton order encoding as well as a status bar for the display of various information generated during runtime (image resolution, zoom scale, output image size and RMSE).

Figure 4-1: Nema Pixpresso Layout

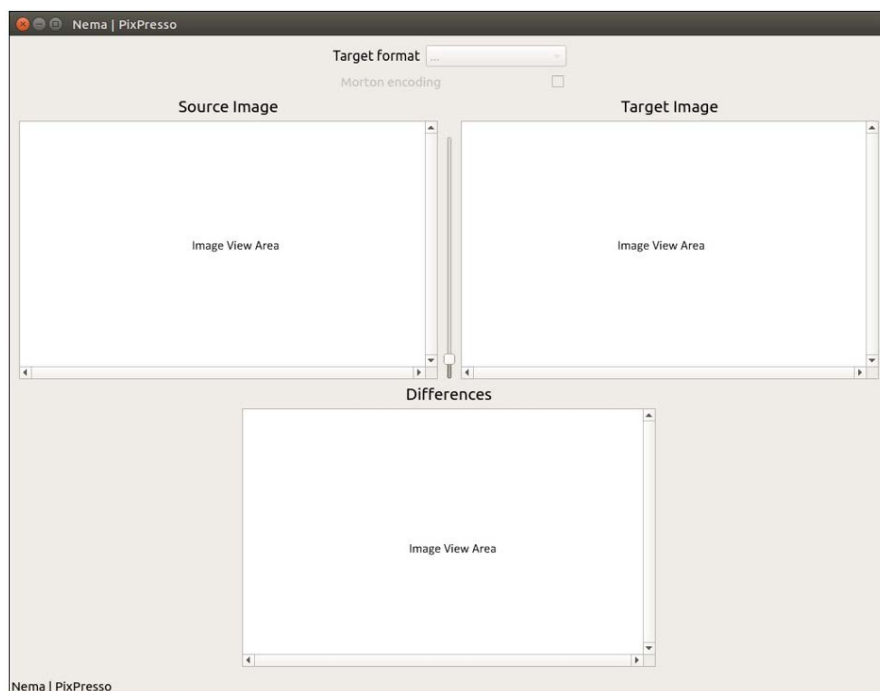

An image can be opened by pressing Open in the File menu. The next step is to perform a conversion into a desired format. This is performed by selecting the format in the combo-box. During the conversion, a progress-bar containing the progress of the procedure is displayed. After the successful conversion of an image from one format to another, a comparison between the original and the final image has to be made, so that the user can evaluate whether the specific conversion meets specific requirements. For this purpose, the RMSE (Root Mean Square Error) metric between the original and the converted image is displayed in the status bar (Figure 4-2), which calculates a normalized average error value for the whole image distribution. The RMSE values can be within the interval  $[0, 255]$ , with 0 being the value of a perfect conversion (no information loss) and 255 the worst case value (all information is lost). In case whereas the converted image needs to be encoded according to the Morton order encoding, the respective check box needs to be checked. Please note that the formats that support this encoding method are formats of the RGBA-family (32, 16 and 8 bit formats) A-family (A1, A8) and L-family (L8, L4, L2, L1).

Figure 4-2: Nema Pixpresso State After a Conversion

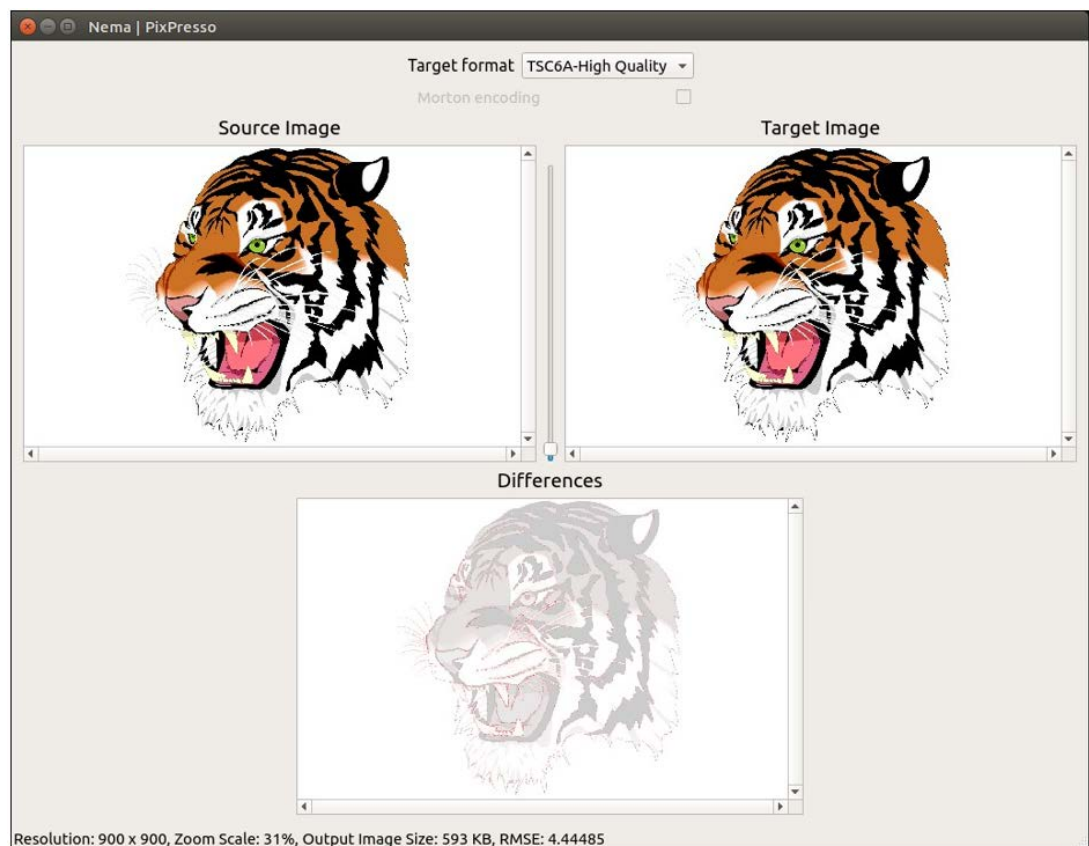


Along with the RMSE, the user can observe differences between the original and the converted image in the Difference view area (Figure 3), so that such differences can be spotted locally within the image. When the converted image matches exactly the original one, the user observes an over-lighted version of the original image. In case that errors exist (i.e. miscalculated values in the converted image

due to compression), they are highlighted with red hue; the bigger an error is the closer to pure red this hue becomes (Figure 4-2 on page 13).

The user can also zoom in or out (digital zoom) within the images to observe them in more details (from 0.03x up to 16x). The zoom functionality can be simply used by changing the value of the zoom slider. Alternatively, the user can press and hold the Ctr key on their keyboard and scroll the wheel of their mouse device while the mouse cursor is inside an image view area. When zooming, the user can observe that the scrollbars of the image views areas are auto adjusting. These scrollbars provide a helpful way of navigating within the image in case where the zoomed image cannot fit inside the image view area. The same functionality can also be achieved by dragging the mouse cursor in the image; in this case the user should see that the mouse cursor takes a "hand" form.

Another feature of the Nema Pixpresso is that the zoom is applied uniformly to all three image view areas as well as that corresponding scrollbars are synchronized with each other (Figure 4-3). Moving one scrollbar of an image view area makes the corresponding scrollbars in the other two image view areas move respectively. This allows the user to navigate within one image and also be able to observe the same region in the other two image view areas, without having to scroll the corresponding scrollbars (e.g., navigating within a sub-region of the converted image, makes the same sub-region of the original and the difference image be displayed).

Figure 4-3: Zooming in a Sub Region of the Original Image

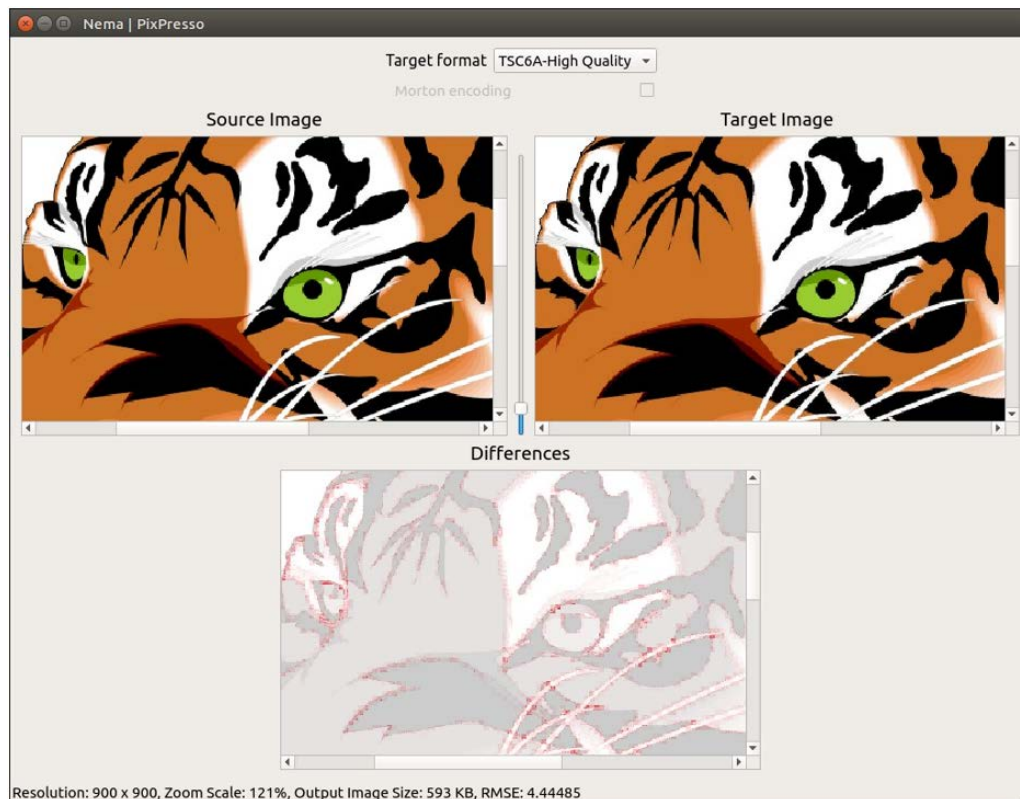

The target image can be scaled to a desired resolution, by selecting the desired resolution under the Edit/Scale menu. By doing so, the source image will be scaled as well before the conversion. This feature can be particularly useful in case whereas an SVG image needs to be converted to a different format, due to the fact that the SVG format can be scaled to any resolution without any scaling artifacts.

Finally, the converted image can be exported in the desired format and be saved in a corresponding file. This is performed by pressing **Export** in the **File** menu. The file extension (e.g., tsc4) is automatically added and the default name is set to be the same as the original image; nevertheless the user can freely set any desired name.

## 4.2 Command Line Mode

Using Nema Pixpresso at GUI Mode, provides an easy way in order to convert a single image and evaluate the conversion quality (differences between the original and the converted image). Nevertheless, Nema Pixpresso can also operate in command line mode. At this mode, the command line arguments are used to indicate the tool the source image path, the target image directory (the filename will be the same as the source image, with different file extension), the target image format, the source image resolution (when loading images in formats that do not store this information), the target image resolution (optimal), a flag that indicates whether the source image is encoded using the Morton order code, another flag to indicate that the target image should be encoded using the Morton order code as well as a flag to indicate the tool that the target image should be exported as header file. The command line arguments are summarized in the following listing.

### Nema Pixpresso Command Line Arguments

```
Usage options:
  -h, --help           : Display this help message
  -s, --src            : Source image path
  -d, --dst            : Destination image directory (optional). If this
                        field is empty the destination image will be
                        saved inside the source image directory
  -f, --format        : Target image format (PNG, RGBA8888, ABGR8888,
                        BGRA8888, ARGB8888, RGB24, BGR24, RGBA5650,
                        RGBA5551, RGBA4444, ARGB4444, RGBA3320, A8, A4,
                        A2, A1, A4-LE, A2-LE, A1-LE, L8, L4, L2, L1, L4-
                        LE, L2-LE, L1-LE, TSC4F, TSC4HQ,
                        TSC6F, TSC6HQ, TSC6AF, TSC6AHQ, JPG, RGBA2222,
                        BGRA2222, ARGB2222, ABGR2222, LUT2, LUT4, LUT16,
                        LUT256, AL44,AL88, ARGB1555, BGRA5650, TSVG
                        (beta), ABGR1555, BGRA5551, ABGR4444, BGRA4444)
  -sw, --src_width    : Source image width. Necessary when loading ALL
                        formats except png, svg and jpg
  -sh, --src_height   : Source image height. Necessary when loading ALL
                        formats except png, svg and jpg
  -dw, --dst_width    : Destination image width (optional, in order to
                        scale the output image)
```

---

```
-dh, --dst_height : Destination image height (optional, in order to
                  scale the output image)
-sm, --src_morton : Source image is encoded using Morton code map
-dm, --dst_morton : Destination image will be written using Morton
                  encoding
-i, --include     : Save the Destination image as header file (defined
                  as const array)
-dith, --dithering : Apply dithering when converting to 16/8bit formats
                  (ordered dithering)
-op, --opacity    : Parse opacity attribute (applies to TSVG target
                  format only)
```

Nema Pixpresso can be executed in command line mode as following:

**Linux:**

```
$ ./nema_pixpresso -s /home/pictures/image.png -f RGBA8888
```

**Windows:**

```
> nema_pixpresso.exe -s "C:\pictures\image.png" -f RGBA8888
```

Running the above commands, will convert the source image (image.png), located in the /home/pictures (Linux based system) to RGBA8888 format. The converted image will be saved inside the same directory (/home/pictures) as picture.rgba. The target resolution is not defined, among the arguments therefore it will be the same as the source image. In order to save the image, the directory needs to have write permission rights. The same applies to Windows based systems. On Mac based systems where nema\_pixpresso.app is provided, the command line mode can be executed as following:

```
> ./nema_pixpresso.app/Contents/MacOS/nema_pixpresso -s /home/
pictures/image.png -f RGBA8888
```



© 2025 Ambiq Micro, Inc. All rights reserved.

6500 River Place Boulevard, Building 7, Suite 200, Austin, TX 78730

[www.ambiq.com](http://www.ambiq.com)

[sales@ambiq.com](mailto:sales@ambiq.com)

+1 512.879.2850

A-SOCAPG-SGGA01EN v1.0

December 2025